




VDM-8, 11

## FEATURES

- Input voltage 110-220 Volts AC.
- With On-Off switch.
- Quickly Demagnetizes tools, drills punches, dies, etc. Held by magnetic chucks. Parts are demagnetized by drawing across surface.
- Voltage 200-240 should be ordered.





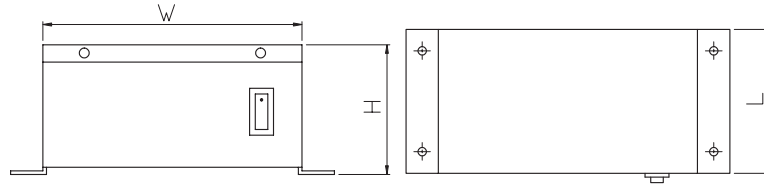


ORDER NO.	INPUT VOLTAGE	CAPACITY	WORKING SURFACE	HEIGHT	WEIGHT (KGS)	DUTY CYCLE	CODE NO.
VDM-8	AC-110V 220V	210VA	160X110	100	4.5	50%	2019-011
VDM-11	AC-110V 220V	550VA	200X280	130	16	100%	2019-021

Unit:mm

# Mini Type Demagnetizer


FOR HANDY AND CAN NOT BE MOVED OBJECT

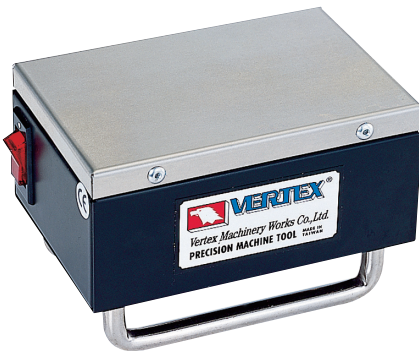

ORDER NO.	INPUT VOLTAGE	CAPACITY	WORKING SURFACE	HEIGHT	WEIGHT (KGS)	DUTY CYCLE	CODE NO.
VDM-9	AC-110V 220V	110VA	123X83	83	1.8	90%	2019-020



Unit:mm

# Tunnel Type Demagnetizer And Magnetizer

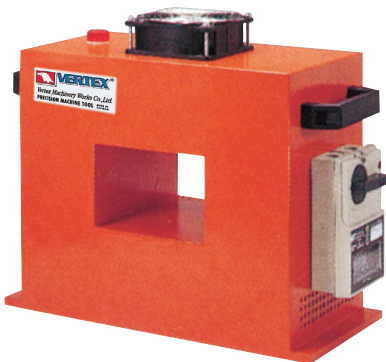

## FEATURES

- Merely using tools to pass through or move into a tunnel will cause a good demagnetizing effect.
- Suitable for planned automatic process; be adapted for delivery belts to proceed in order to increase productivity.
- Suitable for hand manual tools, etc. for filling magnetism.
- Suitable for large production of component spare parts, attachments, tools...etc.
- Suitable for longtime use; be able to use continuously for 24 hours.
- Super efficacy in demagnetizing and magnetizing; suitable for many kinds of metals.
- Attached a fan inside for dissipating heat.



ORDER NO.	POWER SOURCE	CAPACITY	DIMENSION			THROUGH HOLE		NET WEIGHT KGS	DUTY CYCLE	CODE NO.
			L	W	H	A	B			
VDM-150	AC 220/380V (single phase)	3520AV	370	370	200	100	150	33	100%	2019-025
VDM-250		4840AV	470	370	200	150	250			52
VDM-450	AC 220/380V (3 phase)	4400VA	700	500	200	250	450			80