

Lathe

OPTIturn TU 2406 (400 V)

Lathes for home improvement. TU 2406V with electronically adjustable speed

OPTIMUM[®]
MASCHINEN - GERMANY

Article number ▼


3420353

Brand ▼

Optimum

Catalog directory ▼

Metalworking machines » Lathes conventional » OPTIturn TU 2406V / TU 2406

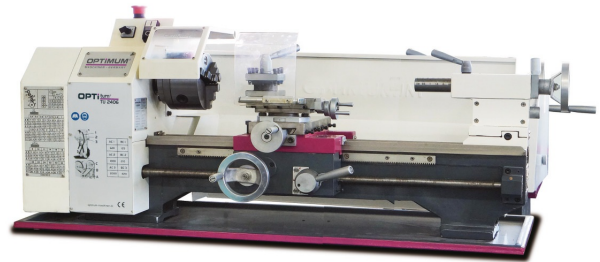

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	1,200 mm	Gross	145 kg	Delivery	Carrier	DualUse	✘
Width	560 mm	Net	127 kg	Content	1 pc(s).	SCIP	n/a
Height	580 mm					SVHC	No



Description ▼

- Precisely manufactured
- Hardened and ground Z-axis guideway
- Guaranteed concentricity of the spindle nose better than 0.009 mm
- Rolled trapezoid spindles
- Leadscrew stored in two sintered bearings
- Two tapered roller bearings in P5 quality
- Precisely crafted sled
- Handwheels with adjustable fine scale 0.04 / 0.01 mm
- Quadruple tool holder
- All guides can be adjusted by wedge strips
- Concentricity - chuck better than 0.05 mm
- Lead screw for thread cutting or automatic longitudinal turning
- Right / left rotation in the control panel switchable
- Tailstock for taper turning ± 5 mm adjustable
- Tailstock quill and handwheel with adjustable fine scale 0.02 mm
- Fast, easy and tool-free adjustment by means of a clamping lever
- Emergency stop impact switch
- thrust bearing
- Extensive accessories
- 3-jaw lathe chuck in the standard scope of delivery
- Stable value

TU 2406V

- Speed change easily adjustable via potentiometer
- Digital speed display
- EMC filter class C1

Delivery content ▼

- Three-jaw lathe chuck $\varnothing 125$ mm, centrally exciting
- Fixed centering point MK 2 and MK 3
- bulkhead
- chip pan
- Quadruple tool holder
- Change gear set
- operating tool

Media informations ▼




Machine bed

- Prepared for measuring system assembly of the X, Z and Z0 axes



Lathe chuck and protection

- Lathe chuck guard with position switch
- Three-jaw lathe chuck Ø 125 mm, centric clamping in standard scope of delivery

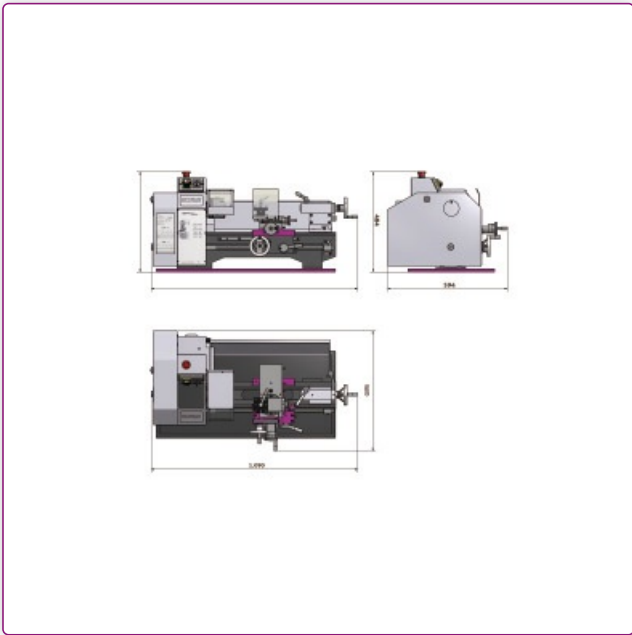

Technical data ▾

Dimensions and weights			
Length (product) approx.	1090 mm	Width/depth (product) approx.	594 mm
Height (product) approx.	484 mm	Net weight approx.	127 kg
Work areas			
Max. height	125 mm	Max. width	550 mm
Swing diameter above machine bed	250 mm	Bed width	135 mm

Speed range			
Number of gears	6	Speed range	125 – 2000 min ⁻¹
Electrical Data			
Drive motor output	0,75 kW	Supply voltage	400 V
Mains frequency	50 Hz		
Spindle			
Spindle chuck	cylindrical Ø 52 mm	Spindle bore/rod passage diameter	21 mm
Spindle cone	MK 3	Tool holder max. chuck height	14 mm
Tailstock			
Tailstock chuck	MK 2	Tailstock quill stroke	70 mm
Pitches			
Metric pitch	0,4 – 3,5 mm/rev	Number of metric pitches	14
Imperial pitch	44 – 10 Gg/1"	Number of imperial pitches	12
Travel			
Travel upper slide	75 mm	Travel cross slide	120 mm
Travel carriage saddle	550 mm		

Accessories ▼



Four-jaw lathe chuck, concentric clamping Ø 125 mm

Article number ▼
3442812

OPTIMUM[®]
MASCHINEN - GERMANY



Four-jaw lathe chuck, individually clamping Ø 125 mm

Article number ▼
3442874

OPTIMUM[®]
MASCHINEN - GERMANY



Chuck flange Ø 125 mm cylindrical

Article number ▼
3440511

OPTIMUM[®]
MASCHINEN - GERMANY



Face plate Ø 220 mm for TU 2406

Article number ▼
3440552

OPTIMUM[®]
MASCHINEN - GERMANY



Quick change tool kit


SWH 1 - A

Repeat accuracy 0.01 mm

Article number ▼

3384301

OPTIMUM[®]
MASCHINEN - GERMANY



Factory assembly

SWH 1-A

Article number ▼

9000401

OPTIMUM[®]
MASCHINEN - GERMANY



Spare steel holder

20x90 type D

Article number ▼

3384302

OPTIMUM[®]
MASCHINEN - GERMANY



Spare steel holder

20 x 85 type H, for round chisel

Article number ▼

3384321

OPTIMUM[®]
MASCHINEN - GERMANY



Turning tool set

10 mm, 11-part

Article number ▼

3441602

OPTIMUM[®]
MASCHINEN - GERMANY




Turning tool set

12 mm, 11-part

Article number ▼

3441603

OPTIMUM[®]
MASCHINEN - GERMANY



Turning tool set

HM 12 mm, 5-part

Article number ▼

3441666

OPTIMUM[®]
MASCHINEN - GERMANY



Turning tool set
HM 12 mm, 5-part "Made in Germany"

Article number ▼
3441212

OPTIMUM[®]
MASCHINEN - GERMANY



Fixed bezel
for TU 2506 / TU 2506V

Article number ▼
3441315

OPTIMUM[®]
MASCHINEN - GERMANY



Rotating bezel
Ø max. 34 mm for TU 2506 / TU 2406

Article number ▼
3441310

OPTIMUM[®]
MASCHINEN - GERMANY



Collet chuck
ER 32, Ø 52 mm, cylindrical

Article number ▼
3440506

OPTIMUM[®]
MASCHINEN - GERMANY



Substructure
MST 1

Article number ▼
3440409

OPTIMUM[®]
MASCHINEN - GERMANY



Digital position indicator
DRO 5
Digital 3-axis position indicator for milling machines and lathes with speed display

Article number ▼
3383975

OPTIMUM[®]
MASCHINEN - GERMANY



Magnetic tape
OMB10 for DRO5 1100 mm

Article number ▼
3383978

OPTIMUM[®]
MASCHINEN - GERMANY



Factory assembly
MPA 3/4/DRO5

Article number ▼
9000420

OPTIMUM[®]
MASCHINEN - GERMANY



Turning tool set
HM 10 mm, 5-part

Article number ▼
3441664

OPTIMUM[®]
MASCHINEN - GERMANY



Internal turning set
10 mm

Article number ▼
3441640

OPTIMUM[®]
MASCHINEN - GERMANY



Internal turning set
12 mm

Article number ▼
3441641

OPTIMUM[®]
MASCHINEN - GERMANY



Center drill set
10tlg. 0.75-4.5 mm HSS

Article number ▼
3203010

OPTIMUM[®]
MASCHINEN - GERMANY



Twist drill HSS with Morse taper
MT 2

Article number ▼
3051002

OPTIMUM[®]
MASCHINEN - GERMANY



Collet chuck
ER 25, Ø 52 mm, cylindrical

Article number ▼
3440505

OPTIMUM[®]
MASCHINEN - GERMANY



Revolving centering point
MT 2

Article number ▼
3440702

OPTIMUM[®]
MASCHINEN - GERMANY



Revolving centering point
MK2 - with exchangeable tips

Article number ▼
3440732

OPTIMUM[®]
MASCHINEN - GERMANY



Revolving centering point
MT 2

Article number ▼
3451002

OPTIMUM[®]
MASCHINEN - GERMANY



Collet set
ER 25, Ø 1-16 mm

Article number ▼
3441109

OPTIMUM[®]
MASCHINEN - GERMANY



Collet set
ER 32, Ø 1 - 16 mm

Article number ▼
3441122

OPTIMUM[®]
MASCHINEN - GERMANY



Universal coolant device

230 V

Article number ▼

3351999

OPTIMUM®
MASCHINEN - GERMANY



Vibration damper machine foot

SE 55

Article number ▼

3352981

OPTIMUM®
MASCHINEN - GERMANY



Leveling plate

SE 1

Article number ▼

3381012

OPTIMUM®
MASCHINEN - GERMANY