

Sandblasters

SSK 2

For clean blasting without pollution of the working environment



Article number ▼

6204001

Brand ▼

Unicraft

Availability ▼

In stock
Immediate delivery

Catalog directory ▼

Workshop and lifting technology »
Bodywork and workshop equipment » Sand blaster

Purchase ▼

Minimum 4 pc(s).



Delivery content ▼

- High quality blasting gun with ceramic nozzle
- 4 ceramic nozzles (4/5/6/7 mm)
- 5 replacement foils for viewing windows

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	950 mm	Gross	48 kg	Delivery	Carrier	DualUse	✘
Width	620 mm	Net	48 kg	Content	4 pc(s).	SCIP	n/a
Height	610 mm					SVHC	No

Root data ▼

Country of origin	EAN	Custom number	Quantity unit
China	4036351046103	84243010	pc(s).


Description ▼

- Suitable for various blasting materials, eg quartz, glass ball, plastic ball, etc.
- Ideal for cleaning, rust removal or paint removal of metal parts of all kinds, eg engine parts, fittings, signs, housings, rims, hinges
- High-quality work gloves made of latex are firmly attached to the housing
- Optimum vision and work safety during workpiece machining due to the lens with glued-on protective foil
- Dust-free work due to circumferential seals on cover and door frame
- Stable storage grid allows laying of workpieces in the cabin interior
- With drain opening for changing the blasting material
- Suction pipe for the blasting material attached to the bottom of the collecting container
- With compressed air connection on the outside
- Glass bead blasting, corundum blasting, silicon carbide, plastic blasting, etc. can be used

Room amenities:

- A large side door for loading and unloading
- 2 exhaust air openings (1 exhaust air connection \varnothing 92 mm and 1 exhaust air outlet \varnothing 64 mm) for connecting an extraction system
- 12 volt fluorescent tube with 230 volt power supply and external switch

Media informations

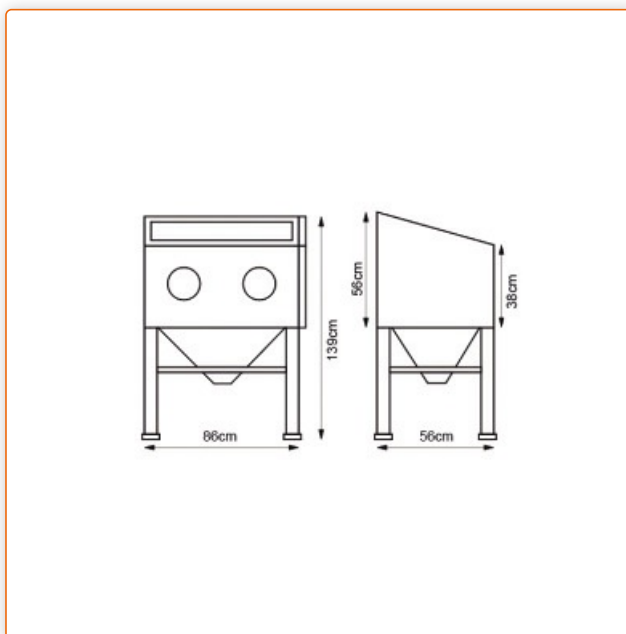

Technical data

General features			
Air requirement average, approx.	200 – 350 l/min	Working pressure	2.8 – 8.0 bar
Abrasive grain size recommended	0.2 – 0.3 mm	Max. abrasive grain size	0.125 – 0.45 mm
Max. load of grid	80 kg	Max. weight of blast media	50 kg
Dimensions and weights			
Length (product) approx.	950 mm	Width/depth (product) approx.	660 mm
Height (product) approx.	1380 mm	Net weight approx.	48 kg
Cabin volume	220 l	Cabin interior length	840 mm
Cabin interior width	550 mm	Cabin interior height	360 mm
Diameter of hand hole	175 mm		
Side door (see drawing)			
Side door A	480 mm	Side door B	558 mm
Side door C	282 mm	Side door D	592 mm

Accessories ▼



Gloves HS SSK2

Article number ▼
6204110

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pair

Price informations ▼



Fluorescent tube LSR SSK1 / 2

Article number ▼
6204113

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Protective film SF-SSK2 / 2.5 / 3

Article number ▼
6204111

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 PU

Price informations ▼



Sandblasting gun SSP SSK1 / 2 / 2.5

Article number ▼
6204101

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Viewing window SS-SSK2

Article number ▼
6204112

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Sandblasting nozzle set Ceramic 4/5/6/7 mm

Article number ▼
6204130

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 PU

Price informations ▼





Sandblasting nozzle

6 mm

Article number ▼

6204132

Availability ▼

In stock
Immediate delivery

Purchase ▼

Minimum 1 pc(s).

Price informations ▼



LED light tube

for SSK 1 / SSK 2

Article number ▼

6204114

Availability ▼

In stock
Immediate delivery

Purchase ▼

Minimum 1 pc(s).

Price informations ▼



Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.