

Motorized sheet metal shears

MTBS 1350-30 B

With NC-controlled backgauge



Article number ▼

3815513

Brand ▼

Metallkraft

Availability ▼

In stock

Immediate delivery

Catalog directory ▼

Metalworking machines » Shears » Sheet metal shears, motor-driven, NC-controlled » MTBS-B

Purchase ▼


Minimum 1 pc(s).



Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	1,920 mm	Gross	1,150 kg	Delivery	Carrier	DualUse	✗
Width	1,320 mm	Net	1,150 kg	Content	1 pc(s).	SCIP	n/a
Height	1,110 mm					SVHC	No

Root data ▼

Country of origin	EAN	Custom number	Quantity unit
 Turkey	4036351216681	84623900	pc(s).


Description ▼

- Heavy, robust welded construction
- Splitter-guided upper beam with adjustable flat guides
- Manual cutting gap adjustment at the front of the machine
- LED cutting line illumination and elongated holes in the top cover for an optimal view of the cutting edge and for cutting on tear-off
- Solid 90° side stop with 1000 mm length, T-slot, tilting cam and scale
- Two solid sheet support arms with T-slots and tilting cams
- Motorized, NC-controlled backgauge with 750 mm travel range
- Backgauge drive with frequency converter, motor with brake and recirculating ball screws
- High-quality, rotatable knives suitable for cutting stainless steel
- Heavy hold-down beam with gentle rubber inserts
- Rear area protected by light curtain
- Operation via mobile foot pedal console with emergency stop

Media informations ▼



Figure shows MTBS 1350-30 B with optional hardware divider and drawer

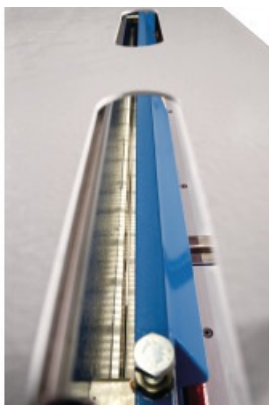

Technical data ▼

General features			
Working width	1350 mm	Cutting performance material tensile strength 400 N/mm ²	3.0 mm
Cutting performance material tensile strength 700 N/mm ²	1.5 mm	Cuts per minute	40
Rear stop adjustment range up to	750 mm	Cutting angle	2,2 °
Dimensions and weights			
Length (product) approx.	1920 mm	Width/depth (product) approx.	1920 mm
Height (product) approx.	1110 mm	Net weight approx.	1150 kg
Electrical Data			
Drive motor output	3 kW	Supply voltage	400 V

Mains frequency


50 Hz

Equipment ▼

Table support made of stainless steel



Accessories ▼




Angle stop, adjustable 0-180°

**Article number ▼**

3887220

Availability ▼No stock available
Information:
Next availability
Unknown**Purchase ▼**

Minimum 1 pc(s).

Price informations ▼

Knife set 1350-30

**Article number ▼**

3887240

Availability ▼No stock available
Information:
Next availability
Unknown**Purchase ▼**

Minimum 1 pc(s).

Price informations ▼

Options equipment ▼



Small parts flap for ejection to the front

**Article number ▼**

3887200

Availability ▼No stock available
Information:
Next availability
Unknown**Purchase ▼**

Minimum 1 pc(s).

Price informations ▼


Hold-up device for thin sheet metal, pneumatic

**Article number ▼**

3887201

Availability ▼No stock available
Information:
Next availability
Unknown**Purchase ▼**

Minimum 1 pc(s).

Price informations ▼

Central lubrication via hand pump ZSHP


**Article number ▼**

3887210

Availability ▼In stock
Immediate delivery**Purchase ▼**

Minimum 1 pc(s).

Price informations ▼



Extension motor backgauge from 750 mm to 1000 mm

VLHAMO750MM1000MM



Article number ▼

3887211

Availability ▼

No stock available

Information:

Next availability

Expected on
calendar week

43/2023

Purchase ▼

Minimum 1 pc(s).

Price informations ▼

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.