

Magnetic core drill

OPTIdrill DM 35V

OPTIMUM
MASCHINEN - GERMANY

Premium machine with continuously variable speed control and maximum feature set

Article number ▼

3071135

Brand ▼

Optimum

Availability ▼

In stock
Immediate delivery

Catalog directory ▼

Metalworking machines » Drilling machines
» Magnetic core drills

Purchase ▼

Minimum 1 pc(s).




Delivery content ▼

- Transport case
- Operating tool
- Safety strap
- quick-change drill chuck

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	565 mm	Gross	15 kg	Delivery	Delivery service	DualUse	✘
Width	155 mm	Net	10 kg	Content	1 pc(s).	SCIP	n/a
Height	355 mm					SVHC	No

Root data ▼

Country of origin	EAN	Custom number	Quantity unit
 China	4030635038778	84592900	pc(s).



Description ▼

- Great performance despite small size and low weight
- Stable drill guide due to long and low-mounted sleeve holder
- Device is ground with dual insulation, and thus ideal for the construction site
- With cooling - coolant is fed through the drill tip
- Conversion from core to full drilling in just a few steps
- Safe and reliable function
- Internal self-lubricating function guarantees a longer transmission service life.
- High magnetic holding force
- Magnetic base has a wear-resistant design to enhance the service life of the magnetic base and thus extend the maximum magnetic holding force

Equipment details:

Motor

- Powerful motor with high torque, low maintenance

Guides

- Safe guides for stability and precision

Control panel

- Confusion-free and ergonomic arrangement of switches

Handles

- Ergonomic, robust handles for "balanced" holding/fastening of the machine.
- Robust crank

Media informations ▼



Picture with optionally available core drill





Control panel

- Confusion-free and ergonomic arrangement of the switches



Automatic internal lubrication

- The coolant is fed directly to the tip of the core drill bit
- No dry running and overheating of the drill bit
- No unnecessary use of coolant
- Tool life and work results are significantly improved



Coolant tank

- Removable coolant tank
- External mounting
- Sophisticated and practical




Motor

- Powerful motor with high torque and low maintenance



Handles

- Ergonomic robust handles for "balanced" holding / fastening of the machine
- Robust crank handle

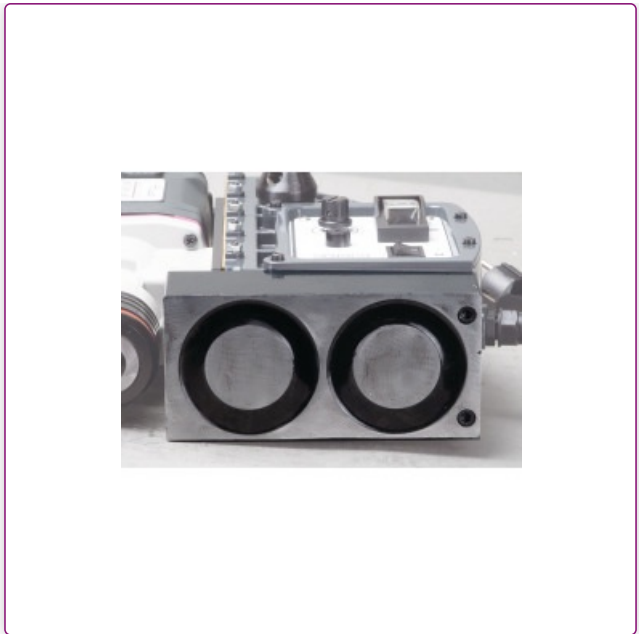

Magnet foot

- Magnet force monitoring (if there is not enough metal or the magnets fail, the machine stops automatically).
- Wear-resistant design to extend the life of the magnet base and thereby the maximum magnetic holding force



Guides

- Safe guides for stability and precision
- Vario machines with low-wear brass guides



Transport box

- For convenient transport and optimum protection
- Ideal protection of the machines even in hard use.

Technical data

Dimensions and weights			
Length (product) approx.	250 mm	Width/depth (product) approx.	220 mm
Height (product) approx.	470 mm	Net weight approx.	10.8 kg

Drive output			
Absorbed power drive motor	1.55 kW		
Collet			
Spindle chuck	fixed	Drill adapter	Weldon 3/4"
Speed range			
Idling speed(s) (CW run)	120 – 830 min ⁻¹	Speed control	stepless
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Standards and certifications			
EMV-Class	C2	Standard	DIN EN 55011
Protection class	IP 42		
Magnet			
Magnetic holding force	14.8 kN	Magnet base length	166 mm
Magnet base width	80 mm		
Core drills			
Core drills Ø max. with manual feed	35 mm	Max. drilling depth core drilling with manual feed	35 mm
Full drills			
Drill Ø max. full drilling directly mounted	13 mm		

Equipment

Vario drive		Spindle sleeve feed	Manual
-------------	--	---------------------	--------

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.