

Sandblasters

SSK 1.5

For clean blasting without pollution of the working environment



Article number ▼

6204010

Brand ▼

Unicraft

Availability ▼

No stock available

Information:

Next availability

Expected on calendar week 42/2023

Catalog directory ▼

Workshop and lifting technology »

Bodywork and workshop equipment » Sand

blaster



Purchase ▼

Minimum 1 pc(s).

Delivery content ▼

- 3 ceramic nozzles (3.5 mm)
- 3 replacement foils for viewing window

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	495 mm	Gross	13.5 kg	Delivery	Carrier	DualUse	✘
Width	390 mm	Net	12.5 kg	Content	1 pc(s).	SCIP	n/a
Height	410 mm					SVHC	No

Root data ▼

Country of origin	EAN	Custom number	Quantity unit
China	4036351248996	84243010	pc(s).

Description ▼


- Suitable for various blasting materials, eg quartz, glass ball, plastic ball, etc.
- Ideal for paint removal or for cleaning and de-rusting metal parts of all kinds
- High-quality work gloves made of latex are firmly attached to the housing
- Lens with glued-on protective foil allows optimum visibility and safety during workpiece machining
- Dust-free work due to circumferential seals on cover and door frame
- Stable storage grid allows laying of workpieces in the cabin interior
- With opening for draining the blasting material
- Suction pipe for the blasting material attached to the bottom of the collecting container
- With compressed air connection on the outside
- Glass bead blasting abrasives, corundum abrasives, silicon carbide, plastic abrasives and much more. used

Room amenities

- Regulation of working pressure via pressure regulator with manometer
- Fixed jet nozzle with 120 ° tilt for comfortable working with two hands
- Airflow control via foot pedal
- Integrated cabin ventilation with replaceable air filter
- 12 volt fluorescent tube with 230 volt power supply and external switch

Media informations



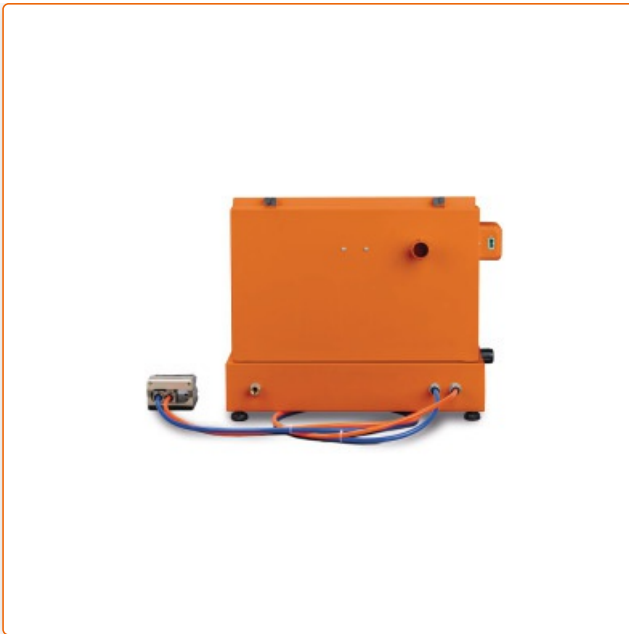

12 volt fluorescent tube with 230 volt power supply and external switch















Cab ventilation with replaceable air filter

Technical data

General features			
Air requirement average, approx.	196 l/min	Working pressure	5.5 – 7.9 bar
Abrasive grain size recommended	0.2 – 0.3 mm	Max. abrasive grain size	0.125 – 0.45 mm
Nozzle diameter	3.5 mm	Max. load of grid	10 kg
Max. weight of blast media	5.45 kg		
Dimensions and weights			
Length (product) approx.	475 mm	Width/depth (product) approx.	370 mm
Height (product) approx.	370 mm	Net weight approx.	12,5 kg
Cabin volume	25.4 l	Cabin interior length	410 mm
Cabin interior width	310 mm	Cabin interior height	200 mm

Diameter of hand hole	100 mm		
Opening hatch (see drawing)			
Opening hatch A	150 mm	Opening hatch B	419 mm
Opening hatch C	261 mm		

Accessories ▼

	Gloves for SSK 1.5		
Article number ▼ 6204160	Availability ▼ In stock Immediate delivery	Purchase ▼ Minimum 1 pair	Price informations ▼
	LED light tube for SSK 1.5		
Article number ▼ 6204166	Availability ▼ In stock Immediate delivery	Purchase ▼ Minimum 1 pc(s).	Price informations ▼
	Filter for SSK 1.5		
Article number ▼ 6204162	Availability ▼ In stock Immediate delivery	Purchase ▼ Minimum 1 pc(s).	Price informations ▼
	Sandblasting nozzle Ceramic 3.5 mm		
Article number ▼ 6204163	Availability ▼ In stock Immediate delivery	Purchase ▼ Minimum 1 pc(s).	Price informations ▼
	Protector for SSK 1.5		
Article number ▼ 6204164	Availability ▼ In stock Immediate delivery	Purchase ▼ Minimum 1 PU (5 pc(s).)	Price informations ▼
	Viewing window for SSK 1.5		
Article number ▼ 6204165	Availability ▼ In stock Immediate delivery	Purchase ▼ Minimum 1 pc(s).	Price informations ▼

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.