

Woodbandsaw

HBS 400

Reliable, torsion-resistant design for precise work



Article number

5900410

Brand

Holzstar

Availability

In stock
Immediate delivery

Catalog directory

Woodworking machinery » Bandsaws »
Holzstar HBS

Purchase

Minimum 1 pc(s).




Delivery content

- Saw band 16.0 x 0.5 x 3378 mm / 4 ZpZ
- Aluminum rip fence

Shipping informations

Packaging Metrics		Weights		Delivery		Other	
Length	720 mm	Gross	155 kg	Delivery	Carrier	DualUse	✘
Width	520 mm	Net	140 kg	Content	1 pc(s).	SCIP	n/a
Height	1,900 mm					SVHC	No


Root data

Country of origin	EAN	Custom number	Quantity unit
 China	4036351032755	84659110	pc(s).

Description


- Torsionally rigid construction
- High stability with minimum space requirement
- Safe and smooth saw cuts in wood
- The heavy cast-iron worktable with polished surface is tiltable from 0 to 45°
- Powerful engine
- Safety switch disengages the machine when opening the door and prevents unintentional further starting and starting
- With precise 3-roller saw band guide at top and bottom Professional band saw with closed base
- Changing the saw blade quick-release via the eccentric lever on the back of the machine without changing the tension setting
- Cast iron flywheels ensure a smooth run
- Easy tilting of the table from 0 to 45° via rocker pick-up
- Standard with two speeds
- Set cutting width easily readable on a scale
- Suitable for saw band widths from 6 to 25 mm
- Including smooth-running aluminum rip fence with quick release on solid round rod guide

Media informations

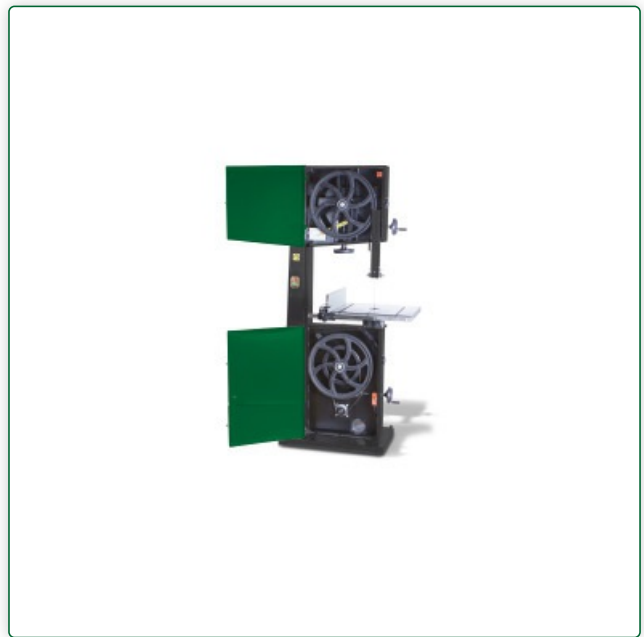



The saw table can be tilted from 0 to 45 degrees on a rocker mount

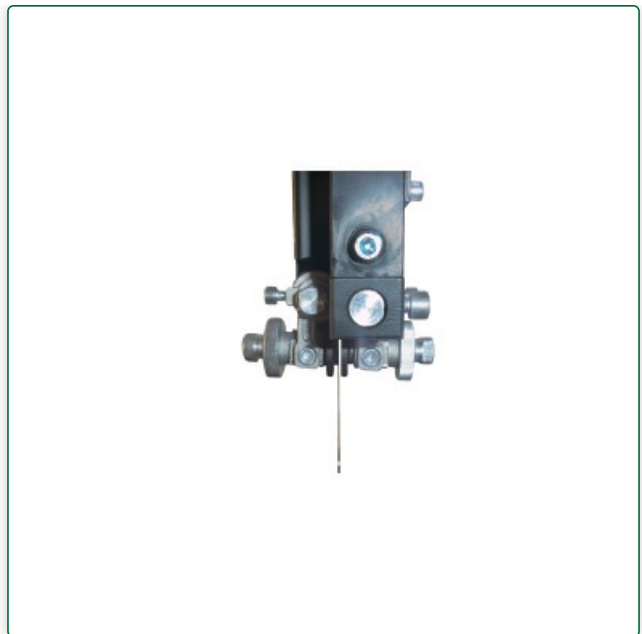

High quality fixed saw blade guide

Technical data ▼

Dimensions and weights			
Length (product) approx.	765 mm	Width/depth (product) approx.	520 mm
Height (product) approx.	1750 mm	Net weight approx.	140 kg
Extraction port			
Extraction port diameter	120 mm		
Work top(s)			
Work table length	530 mm	Work table width	485 mm
Work table height	900 mm	Work table groove width	19 mm
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Input power	1,5 kW		
Cutting ranges			
Max. cutting height 90°	305 mm	Max. cutting width with stop	266 mm
Max. cutting width without stop	416 mm		
Saw band			
Saw band speed(s)	460/980 m/min	Flywheel diameter	426 mm
Saw band length	3378 mm		

Accessories ▼



Saw band
3378 x 6.0 x 0.65 mm, 6 TPI

Article number ▼
5160401

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼





Saw band
3378 x 10.0 x 0.5 mm, 4 TPI

Article number ▼
5160402

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Saw band
3378 x 16.0 x 0.5 mm, 4 TPI

Article number ▼
5160403

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Saw band
3378 x 20.0 x 0.5 mm, 4 TPI

Article number ▼
5160404

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Saw band
3378 x 25.0 x 0.5 mm, 4 TPI

Article number ▼
5160405

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Mitre gauge
WA-HBS400

Article number ▼
5910411

Availability ▼
Blocked article

Purchase ▼
Minimum 1 pc(s).

Price informations ▼
Revoked article



Mitre gauge
WA-HBS400

Article number ▼
5910412

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Mitre gauge
WA-HBS351/400

Article number ▼
5910814

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼





Mitre gauge BTS 250



Article number ✓
5914251

Availability ✓
No stock available
Information:
Incoming stocks
Expected on
calendar week
02/2024

Purchase ✓
Minimum 1 pc(s).

Price informations ✓

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.