

Table saw

TKS 254 PRO (230 V)

Fixed machine with heavy base and maximum cutting depth 80 mm.



Article number ▼

5902027

Brand ▼

Holzstar

Availability ▼

In stock
Immediate delivery

Catalog directory ▼

Woodworking machinery » Circular saw /
Sliding table saws » Table Saws

Purchase ▼

Minimum 1 pc(s).




Delivery content ▼

- Substructure
- Sliding table
- Table extension
- Rip fence
- Saw blade 254 x 30 x 3.0 mm Z40
- Saw blade guard with suction hose
- Angle stop

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	1,430 mm	Gross	154 kg	Delivery	Carrier	DualUse	✘
Width	1,000 mm	Net	132 kg	Content	1 pc(s).	SCIP	n/a
Height	1,030 mm					SVHC	No

Root data ▼

Country of origin	EAN	Custom number	Quantity unit
 China	4036351250647	84659120	pc(s).

Description ▼

- Large dimensioned cast iron table
- Saw blade tilt from 0° to 45°, precise, accurate to the degree and conveniently adjustable via handwheel and scale
- Large central suction connection Ø 100 mm
- The saw blade height adjustment is also carried out via a hand wheel from the operator's front panel
- The stable suspension of the saw unit at the front and rear enables precise cuts to be made
- Equipped with powerful motor and thermal overload protection
- Incl. saw blade protection hood with integrated suction connection
- With standard table extension

Media informations






With accurate and smooth height and tilt adjustment of the saw unit through easy-to-use handwheel



Parallel fence with round bar guide

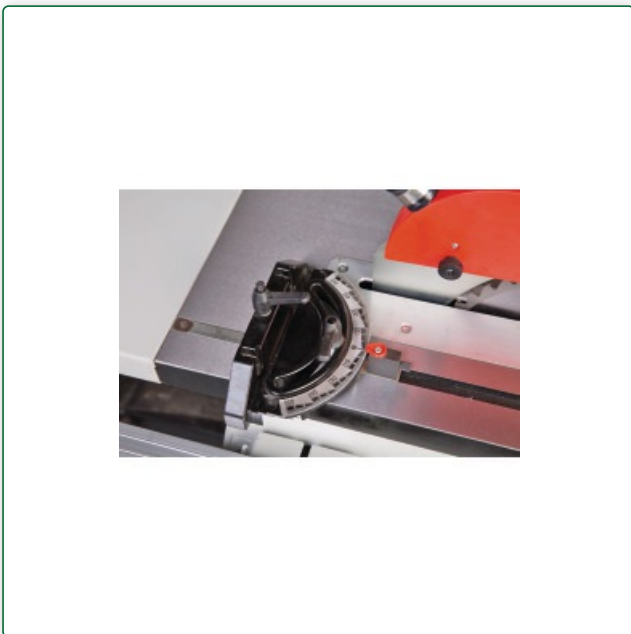

High-quality angle stop included

Technical data ▼

Dimensions and weights			
Length (product) approx.	1430 mm	Width/depth (product) approx.	1000 mm
Height (product) approx.	1030 mm	Net weight approx.	131 kg
Extraction port			
Extraction port diameter bottom	100 mm	Saw blade protection extraction port diameter	30 mm
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Drive motor output	1,5 kW	Absorbed power drive motor	2.1 kW
Total output	2.1 kW	Total rated value	9.3 A
Motor speed	2800 min ⁻¹		

Sliding carriage and table			
Sliding carriage length	400 mm	Sliding carriage width	250 mm
Table length	720 mm	Table width	480 mm
Work height	835 mm		
Noise emission			
Sound pressure level	84.2 dB(A)		
Circular saw unit			
Max. cutting width with rip fence	610 mm	Max. cross cut width left from saw blade	550 mm
Saw blade angle	90 – -45 °	Max. cutting height 90°	80 mm
Max. cutting height -45°	54 mm	(Main) saw blade diameter	254 mm
(Main) saw blade speed	4000 min ⁻¹		

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.