

DATASHEET

Surface and thickness planer **ADH 41C**



Article number v 5904041

Brand ✓ Holzstar

Availability v In stock Immediate delivery

Catalog directory v

Woodworking machinery » Planers » Surface and thickness planers » Surface and thickness planer ADH

Purchase 🗸

Minimum 1 pc(s).



Shipping informations v

| Packaging Me | etrics | Weights | | Delivery | | Other | |
|--------------|----------|---------|--------|----------|----------|---------|-----|
| Length | 1,670 mm | Gross | 300 kg | Delivery | Carrier | DualUse | × |
| Width | 690 mm | Net | 260 kg | Content | 1 pc(s). | SCIP | n/a |
| Height | 980 mm | | | | | SVHC | No |

Root data 🗸

| Country of origin | EAN | Custom number | Quantity unit |
|-------------------|---------------|---------------|---------------|
| *` China | 4036351248941 | 84659200 | pc(s). |

Description ~

- For angular joining (90 °) and straightforward dressing of solid wood boards, planks and strips
- Simple and precise adjustment of the chip removal in dimensionally accurate thickness planing
- Automatic workpiece feed
- Easily adjustable aluminum dressing fence, tiltable from 90 $^\circ$ to + 45 $^\circ$
- Large dimensioned dressing table made of ribbed die-cast aluminum
- · Large thick cast iron table with ground surface
- Integrated, foldable chip extractor hood

Equipment:

Simultaneous opening of the dressing tables

• Simultaneous folding up of the dressing tables with spring support for a quick and easy changeover for thickness planing in seconds


Fixed suction hood

- Thanks to the fixed suction hood, it is no longer necessary to change the suction hose during the conversion
- time-saving

The table height adjustment is easy and convenient via a handwheel

Media informations v



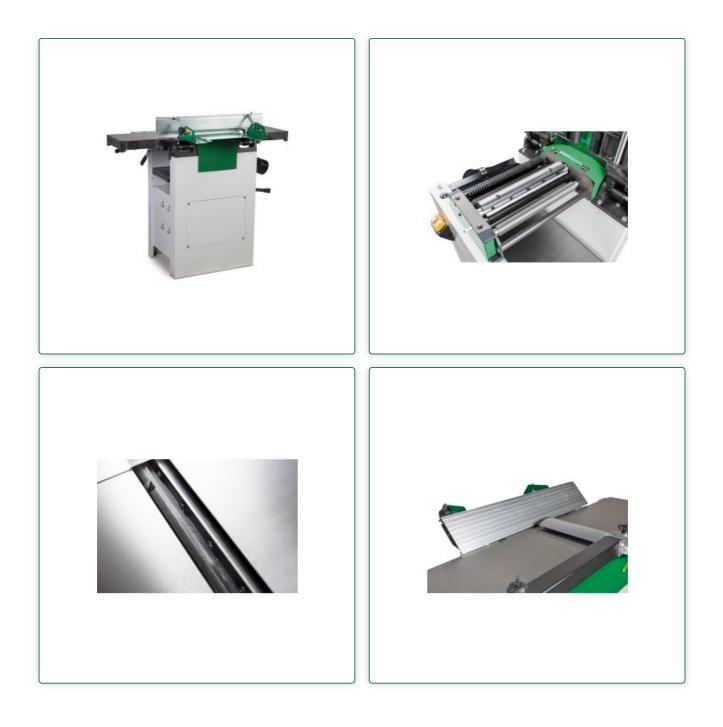





The integrated suction connection ensures a clear view when dressing / planing



Adjustment of chip removal via control lever



Thick table adjustment via handwheel, scale and numeric display

Technical data 🗸

| Dimensions and weights | | | |
|------------------------------------|-----------|---------------------------------|--------|
| Length (product) approx. | 1620 mm | Width/depth (product) approx. | 920 mm |
| Height (product) approx. | 1010 mm | Net weight approx. | 260 kg |
| Jointing | | | |
| Infeed table length | 1640 mm | Infeed table width | 425 mm |
| Working height | 850 mm | Max. cutting depth of joints | 3 mm |
| Planing stop pivoting range | 90 – 45 ° | | |
| Extraction port | | | |
| Extraction port diameter thickness | 120 mm | Extraction port diameter joints | 120 mm |
| | | | |

| Thickness | | | |
|-------------------------------|--------------------------|-------------------------------|------------------------|
| Thicknessing table length | 600 mm | Thicknessing table width | 408 mm |
| Working height min. thickness | 5 mm | Working height max. thickness | 225 mm |
| Max. cutting depth thickness | 3 mm | | |
| Electrical Data | | | |
| Drive motor output | 3,0 kW | Absorbed power drive motor | 3.73 kW |
| Supply voltage | 400 V | Mains frequency | 50 Hz |
| Planing knife shaft | | | |
| Planing shaft type | Strip planer blade shaft | Planing shaft diameter | 70 mm |
| Number of planing blades | 3 St | Planing shaft speed | 5200 min 1 |
| Max. planing width | 408 mm | | |
| Feed | | | |
| Feed speed | 7 m/min | | |

Accessories 🗸

| | Replacement s for ADH 41C 4 pieces) | et planer knife 10 x 25 x 3.15 r | nm HSS (3 | |
|---|---|--|---|----------------------|
| | Article number ✓ 5914041 | Availability ❤ In stock Immediate delivery | Purchase ✓ Minimum 1 Set (3 pc(s).) | Price informations V |
| | | | | |
| < | | djustment gaug act cutting overstand | | |

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.