

Surface and thickness planer

ADH 2540 (230V)



Compact model with integrated suction for do-it-yourselfers and craftsmen

Article number ✓

5904125

Brand ✓

Holzstar

Availability ✓

In stock
Immediate delivery

Catalog directory ✓

Woodworking machinery » Planers »
Surface and thickness planers » Surface
and thickness planer ADH

Purchase ✓

Minimum 1 pc(s).




Delivery content ✓

- Suction connection hose, Ø 76 mm, 920 mm
- Strip planer knife set
- Chip bag

Shipping informations ✓

| Packaging Metrics | | Weights | | Delivery | | Other | |
|-------------------|----------|---------|-------|----------|----------|---------|-----|
| Length | 1,160 mm | Gross | 93 kg | Delivery | Carrier | DualUse | ✘ |
| Width | 610 mm | Net | 87 kg | Content | 1 pc(s). | SCIP | n/a |
| Height | 585 mm | | | | | SVHC | No |

Root data ✓


| Country of origin | EAN | Custom number | Quantity unit |
|---|---------------|---------------|---------------|
|  China | 4036351286424 | 84659200 | pc(s). |

Description ✓

- For angular joining (90°) and precise planing of solid wood boards and moldings
- Automatic workpiece feed
- Rubberized extraction roller protects the wood surface when planing thick
- Suction integrated in the substructure
- With chassis as standard
- Simple and precise adjustment of the chip removal
- Dressing table made of milled cast aluminum
- Space-saving compact design

Media informations



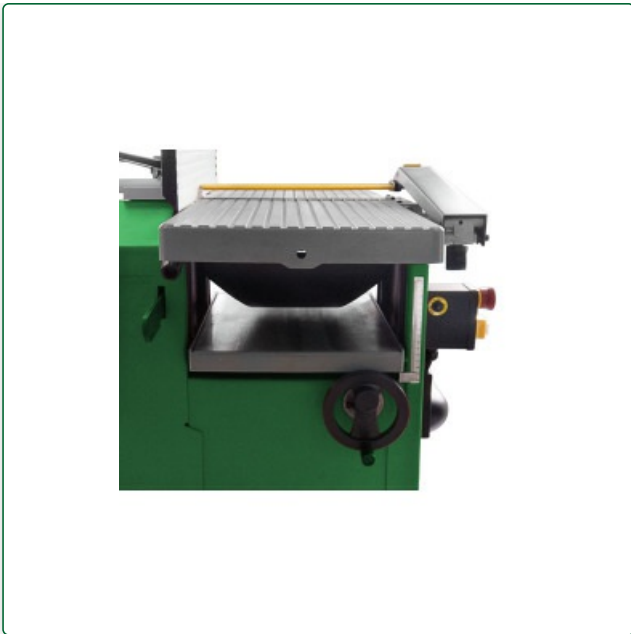

Thicknessing

- Height adjustment of the thickness table easily and conveniently via handwheel and scale
- Chip removal up to 2 mm possible



Surface planer

- Easy adjustment of the chip removal up to 3 mm using the control lever



Practical undercarriage

- For conveniently changing the surface planer in the workshop
- Undercarriage can be extended / retracted

Technical data ▼

| Dimensions and weights | | | |
|--------------------------|---------|-------------------------------|--------|
| Length (product) approx. | 1105 mm | Width/depth (product) approx. | 750 mm |
| Height (product) approx. | 1075 mm | Net weight approx. | 87 kg |
| Joining | | | |
| Total length of table | 1050 mm | Infeed table length | 510 mm |
| Infeed table width | 260 mm | Working height | 920 mm |

| | | | |
|----------------------------------|--------------------------|----------------------------------|------------------------|
| Max. cutting depth of joints | 3 mm | Planing stop length | 635 mm |
| Planing stop height | 127 mm | Planing stop pivoting range | 90 – 45 ° |
| Extraction port | | | |
| Suction hood connection diameter | 75 mm | Suction unit connection diameter | 75 mm |
| Footprint | | | |
| Machine body length | 450 mm | Machine body width/length | 420 mm |
| Thickness | | | |
| Thicknessing table length | 480 mm | Thicknessing table width | 254 mm |
| Working height min. thickness | 6 mm | Working height max. thickness | 160 mm |
| Working length min. thickness | 250 mm | Max. cutting depth thickness | 2 mm |
| Electrical Data | | | |
| Duty type drive motor | S1 | Drive motor output | 1,2 kW |
| Absorbed power drive motor | 1,8 kW | Supply voltage | 230 V |
| Mains frequency | 50 Hz | | |
| Noise emission | | | |
| Sound pressure level Lp | 81 dB(A) | Sound power level Lw | 93 dB(A) |
| Planing knife shaft | | | |
| Planing shaft type | Strip planer blade shaft | Planing shaft diameter | 62 mm |
| Number of planing blades | 2 St | Planing shaft speed | 6700 min ⁻¹ |
| Max. planing width | 254 mm | | |
| Feed | | | |
| Feed speed | 8.5 m/min | | |

Accessories ▼



Filter bag ADH 2540

Article number ▼
5914060

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Suction hose ADH 2540 / 3050

Article number ▼
5914062

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Replacement set planer knife ADH 2540 (2 pieces)

Article number ▼
5914063

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 Set (2
pc(s).)

Price informations ▼



Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can

deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.