

Pure air dust extractor

RLA 1213 M

Dust-tested to H3 with 100% air return for commercial use, M version with automatic filter cleaning

Article number v

5131202

Brand 🗸

Holzkraft

Availability 🗸

In stock Immediate delivery

Catalog directory v

Woodworking machinery » Extractors and dust collectors » Pure air dust extractor » RLA 1101/1103/1213 / 1213M

Purchase 🗸

Minimum 1 pc(s).



Shipping informations v

Packaging Me	etrics	Weights		Delivery		Other	
Length	1,200 mm	Gross	161 kg	Delivery	Carrier	DualUse	×
Width	800 mm	Net	121 kg	Content	1 pc(s).	SCIP	n/a
Height	2,200 mm					SVHC	No

Root data 🗸

Country of origin	EAN	Custom number	Quantity unit
Germany	4036351035855	84213925	pc(s).




Quality - Made in Germany

Description 🗸

- High-performance bag filter with special surface coating
- Filter of category M
- Dust tested to H3, residual dust content < 0.1 mg / m³
- Large dimensioned filling container for easy and quick replacement of chip bags extendable
- Level controlled by a sight glass
- Approved as industrial vacuum cleaner in conjunction with a floor cleaning set
- Reduced power consumption at full suction power and economical consumption thanks to optimized air flow and high-performance fan with backward-curved impeller arranged on the clean air side
- With aerodynamically sophisticated housing
- Optimum pre-separation by a cyclone already in the intake area
- Filters with large folds, therefore easy to clean, so that highest filter life is achieved and only very low maintenance and operating costs
- Filter cleaning via a hand lever
- M version with automatic filter cleaning
- Due to its low weight, swivel castors and large handles, it can be used quickly and efficiently at various workstations

Media informations v

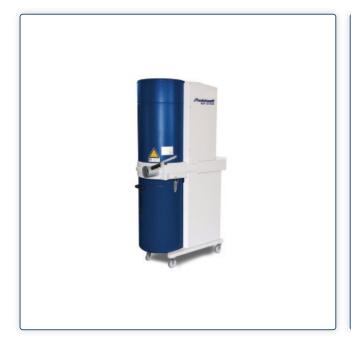



All units of this series dust tested to H3, residual dust content below 0.1 mg / m^{3}


Technical data 🗸

Dimensions and weights			
Length (product) approx.	1178 mm	Width/depth (product) approx.	650 mm
Height (product) approx.	1973 mm	Net weight approx.	121 kg
Chip collection volume	135	I Extraction duct inlet outside nominal width	
Electrical Data			
Supply voltage	400 V	Mains frequency	50 Hz
Suction motor efficiency class	IE3	Drive motor output	1,5 kW
Filter			
Filter surface area	5.1 m²	Residual dust content	< 0.1 mg/m ³
Filter cleaning	automatic		
Noise emission			
Max. sound pressure level	75 dB(A)		

Volume flow		
Rated volume flow 8	14 m³/h Max. volume f	ow 1140 m³/h



Accessories v

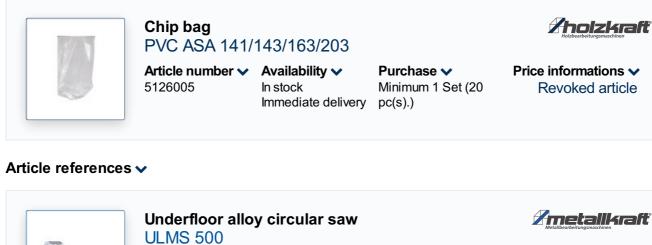

Automatic model with rising saw blade

Article number V Availability V Purchase V 3627500 No stock available Minimum 1 pc(s). Information: Next availability Expected on calendar week 20/2024



Underfloor alloy circular saw **ULMS 600** Automatic model with rising saw blade

Article number V Availability V Purchase V 3627600 In stock Minimum 1 pc(s). Immediate delivery

 Underfloor allo ULMS 420 Automatic model wit	-			
Article number ∨ 3627420	Availability No stock available Information: Next availability Expected on calendar week 20/2024	Purchase ∨ Minimum 1 pc(s).	Price informations V	

Price informations V

Zmetallkraft

Price informations V

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.