

Woodbandsaw HBS 813 S



Precision saws with great cutting performance for the professional

Article number ▼

5150813

Brand ▼

Holzkraft

Availability ▼

In stock
Immediate delivery

Catalog directory ▼

Woodworking machinery » Bandsaws »
HBS S

Purchase ▼

Minimum 1 pc(s).




Delivery content ▼

- Mitre gauge
- Saw band
- Push stick

Shipping informations ▼

Packaging Metrics		Weights		Delivery		Other	
Length	2,500 mm	Gross	528 kg	Delivery	Carrier	DualUse	✘
Width	730 mm	Net	480 kg	Content	1 pc(s).	SCIP	n/a
Height	1,270 mm					SVHC	No


Root data ▼

Country of origin	EAN	Custom number	Quantity unit
 China	4036351320654	84659110	pc(s).

Description ▼

- Heavy design with high weight for maximum smoothness
- Particularly quiet and precise running thanks to the torsion-resistant machine housing
- Precisely adjustable aluminum rip fence
- cast Flywheels with rubber coating and chip scraper brush
- Large cast iron saw table, swiveling from 0° to +45° with polished and polished surface
- Precise cutting height adjustment using a rack with a millimeter scale
- Two extraction nozzles

Media informations

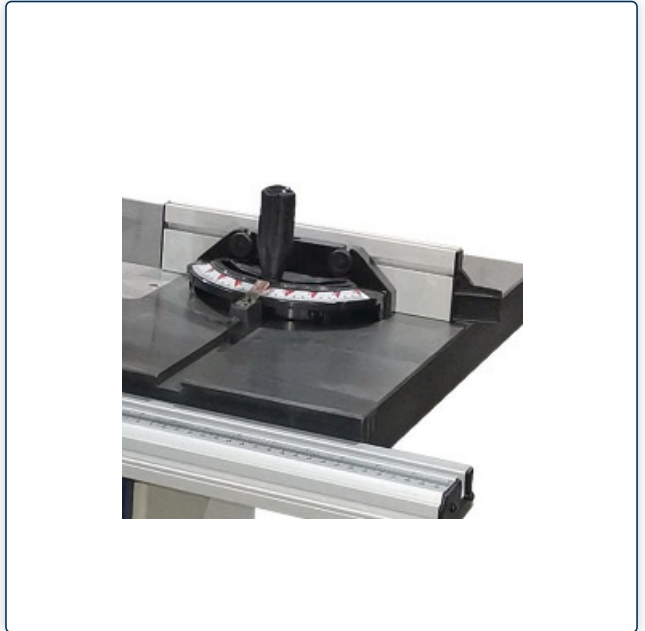

Angle stop

- Supplied as standard
- Steplessly adjustable from -60° to $+60^\circ$



Rip fence

- Precisely adjustable
- With quick clamping and easy-to-read millimetre scale



Cutting height adjustment

- Quickly via handwheel and toothed rack
- Precise display of cutting height by millimetre scale



Quick clamping system

- Eccentric quick tensioning lever
- No change of the set band tension



Band wheel

- Made of cast iron with rubber coating
- With chip scraper brush

Technical data ▾

Dimensions and weights			
Length (product) approx.	1600 mm	Width/depth (product) approx.	1000 mm
Height (product) approx.	2500 mm	Net weight approx.	480 kg
Extraction port			
Extraction port diameter	2 x 120 mm		

Work top(s)			
Work table length	900 mm	Work table width	700 mm
Work table height	1050 mm	Work table extension length	200 mm
Work table extension width	700 mm	Work table pivot	0 – 45 °
Work table pivot explanation	For safety reasons, a holding device / stop must be fitted from 20° to prevent the wood from slipping!		
Electrical Data			
Supply voltage	400 V	Mains frequency	50 Hz
Input power	5.5 kW		
Cutting ranges			
Max. cutting height 90°	470 mm	Max. cutting height 45°	285 mm
Max. cutting width with stop	595 mm	Max. cutting width without stop	800 mm
Saw band			
Saw band speed(s)	1080 m/min	Flywheel diameter	810 mm
Saw band length	5610 mm	Saw band length min.	5601 mm
Saw band length max.	5621 mm	Saw band width	38 mm
Saw band width max.	50 mm	Saw band thickness	0,65 mm
Saw band guide	High quality fixed saw band guide		

Accessories ▾



Saw band 5611 x 10 x 0.6 mm 4 TPI




Article number ▾
5169410

Availability ▾
In stock
Immediate delivery

Purchase ▾
Minimum 1 pc(s).

Price informations ▾



Saw band 5611 x 16 x 0.7 mm 4 TPI



Article number ▾
5169416

Availability ▾
In stock
Immediate delivery

Purchase ▾
Minimum 1 pc(s).

Price informations ▾



Saw band 5611 x 20 x 0.7 mm 3 TPI



Article number ▾
5169420

Availability ▾
In stock
Immediate delivery

Purchase ▾
Minimum 1 pc(s).

Price informations ▾



Saw band
5611 x 25 x 0.9 mm 3 TPI



Article number ▼
5169425

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼



Saw band
5611 x 32 x 0.9 mm 2 TPI



Article number ▼
5169432

Availability ▼
In stock
Immediate delivery

Purchase ▼
Minimum 1 pc(s).

Price informations ▼

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.