

DATASHEET

Sandblasters

SSK 5

with door opening on both sides and integrated extraction system

Article number V

6204006

Brand → Unicraft

Unicrait

Availability 🗸

No stock available Information: Next availability Expected on calendar week 18/2025

Catalog directory v

Workshop and lifting technology » Bodywork and workshop equipment » Sand blaster

Purchase 🗸

Minimum 1 pc(s).

Shipping informations ~

Wer	kstatttechnik	aft



Packaging Metri	ics	Weights		Delivery		Other	
Length	1,430 mm	Gross	215 kg	Delivery	Carrier	DualUse	×
Width	1,350 mm	Net	215 kg	Content	1 pc(s).	SCIP	n/a
Height	1,080 mm					SVHC	No

Root data 🗸

Country of origin	EAN	Custom number	Quantity unit
* China	4036351353348	84243010	pc(s).

Description 🗸

- Suitable for various blasting materials, e.g. quartz, glass beads, plastic beads, etc.
- Ideal for cleaning, derusting or paint removal
- · High-quality latex work gloves are firmly attached to the housing
- · Optimum visibility thanks to protective screen with replaceable glass protection film
- Dust-free working thanks to all-round seals on the lid and door frame
- Sturdy storage grid allows workpieces to be placed inside the cabin
- With drain opening for changing the blasting material
- Suction pipe for the blasting material attached to the bottom of the collection container
- · No laborious turning of workpieces thanks to door opening on both sides via gas pressure springs
- Integrated extraction system with replaceable air filter for optimum visibility
- · Blasting gun installed on both sides with foot pedal operation for fast and efficient sandblasting
- Four fluorescent tubes (230 V), in separate housing with protective screen and replaceable protective film for a well-lit work area
- · Two separate switches for extraction and cabin lighting
- Regulation of the working pressure via pressure regulator with pressure gauge
- Cross struts on the feet enable easy transportation with a pallet truck
- Pneumatic safety cut-out when the door is opened

Manufacturer

Stürmer Maschinen GmbH Dr.-Robert-Pfleger-Str. 26, 96103 Hallstadt, Germany info@stuermer-maschinen.de

Media informations V







• Latex gloves and blasting guns mounted on both sides for blasting bulky workpieces from both sides without turning



• Access from both sides via doors for easy handling of workpieces


Technical data 🗸


General features			
Working pressure	7 bar	Connecting thread	3/8 "
Abrasive grain size recommended	0.2 – 0.3 mm	Max. abrasive grain size	0.125 – 0.45 mm
Max. load of grid	150 kg	Max. weight of blast media	220 kg
Extraction performance	25 m³/h		
Dimensions and weights			

Length (product) approx.	1524 mm	Width/depth (product) approx.	1399 mm
Height (product) approx.	1839 mm	Net weight approx.	215 kg
Cabin volume	1200 I	Cabin interior length	1300 mm
Cabin interior width	1180 mm	Cabin interior height	825 mm
Diameter of hand hole	175 mm		
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Extraction absorbed power	1.2 kW		

Accessories 🗸

Sandblasting r Boron carbide Article number v 6204134	7 mm	Purchase 	Vierkstatttechnik
Fluorescent tu LSR-SSK4/5 Article number > 6204152		Purchase 	Price informations V
Fluorescent tu LSR-SSK2.5/3 Article number V 6204127	3/3.1/4/5	Purchase ∨ Minimum 1 pc(s).	Price informations V
Protective film SF-SSK4/5 Article number ✓ 6204151		Purchase → Minimum 1 PU (5 pc(s).)	Price informations V
Protective film SFB SSK4/5 Article number ✓ 6204153	lighting Availability ✓ In stock Immediate delivery	Purchase → Minimum 1 PU (5 pc(s).)	Verkstatttechnik

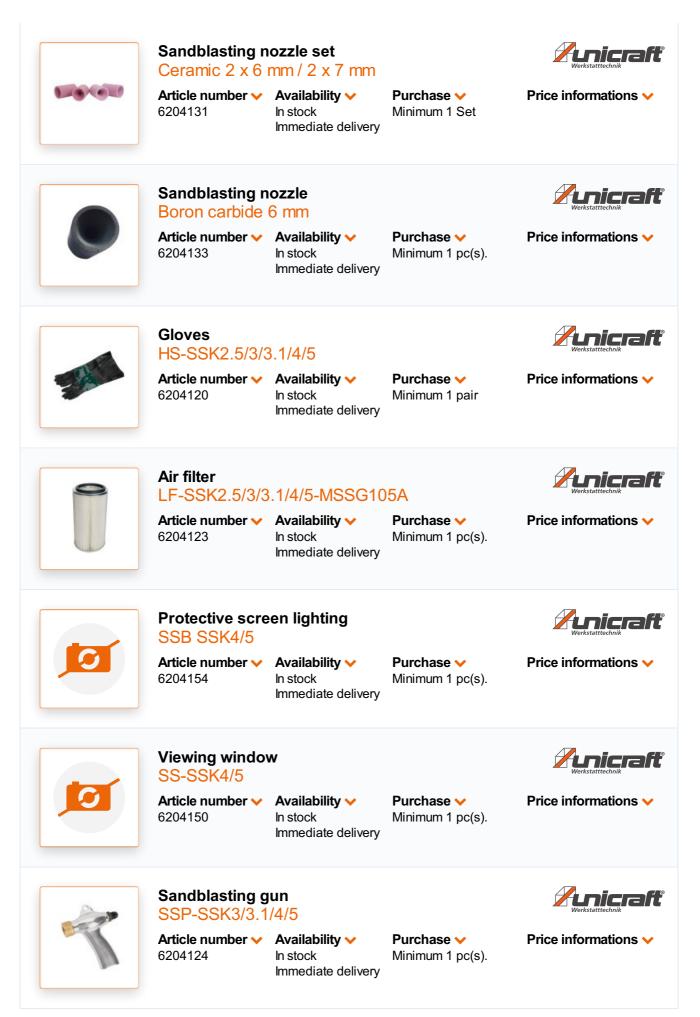

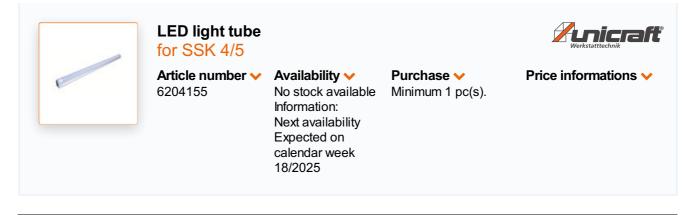

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.