

## Table router

### TF 50 E

Ideal for use on workbenches

#### Article number ✓

5901905

#### Brand ✓

Holzstar

#### Availability ✓

In stock

Immediate delivery

#### Catalog directory ✓

Woodworking machinery » Moulders »

Holzstar TF

#### Purchase ✓

Minimum 20 pc(s).




#### Delivery content ✓

- Table extensions on both sides
- Mitre fence
- Aluminum routing fence
- Collets for 6, 8 i 12 mm
- Assembly tool (hexagon socket wrench 4mm and 5mm, wrench SW19 and SW24)

#### Shipping informations ✓

Packaging Metrics		Weights		Delivery		Other	
Length	670 mm	Gross	23 kg	Delivery	Delivery service	DualUse	✗
Width	535 mm	Net	21 kg	Content	20 pc(s).	SCIP	n/a
Height	390 mm					SVHC	No

#### Root data ✓

Country of origin		EAN	Custom number	Quantity unit
	China	4036351317975	84659200	pc(s).

#### Description ✓

- Compact and handy design for comfortable use
- Variable speed range from 11500 to 24000 min<sup>-1</sup>
- Spindle height adjustable from 0 to 40 mm
- Large table support thanks to standard extensions on both sides
- Work table made of aluminum
- Mitre stop and various collets included

### Manufacturer

Stürmer Maschinen GmbH  
 Dr.-Robert-Pfleger-Str. 26, 96103 Hallstadt, Germany  
[info@stuermer-maschinen.de](mailto:info@stuermer-maschinen.de)


### Media informations ✓



Connection port for external extraction unit




- Spindle height adjustable from 0 to 40 mm

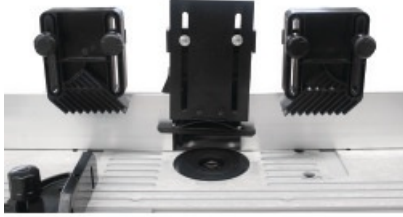

- Clamping brackets with long guides for different workpiece heights



- Mitre stop included

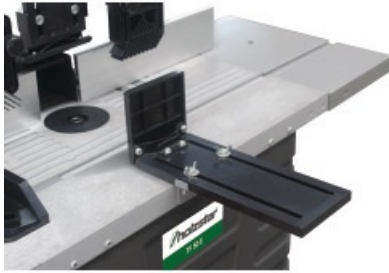

- Clamping brackets with long guides for different workpiece widths

## Technical data ✓

Dimensions and weights			
Max. length (product) ca.	610 mm	Max. width/depth (product) ca.	360 mm
Max. height (product) ca.	311 mm	Length (product) approx.	1030 mm
Width/depth (product) approx.	360 mm	Height (product) approx.	311 mm
Net weight approx.	21 kg		
Extraction port			
Extraction port diameter	100 mm		

Work table			
Work table length	610 mm	Work table width	360 mm
Table height	311 mm		
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Drive motor output	1,5 kW	Protection class drive motor	IP20
Duty type drive motor	S1		
Milling spindle			
Milling spindle stroke	40 mm	Spindle speed(s)	11500 – 24000 min <sup>-1</sup>
Milling cutter diameter max.			
Max. tool diamter	50 mm		

## Equipment ▼

Height adjustment of the spindle	manual	
----------------------------------	--------	--

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.