



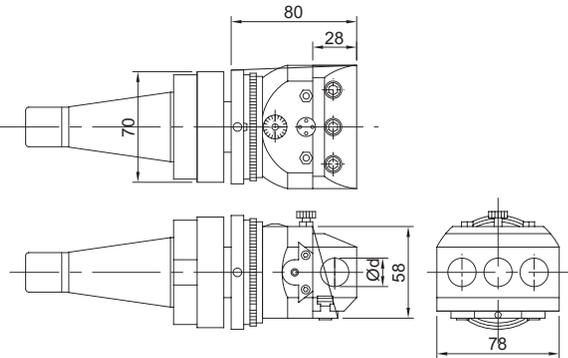
Universal Boring And Facing Master Head VERTEX®

BORING CAPACITY Ø5-Ø250
FOR VERTICAL HOLE BORING IS Ø110

1 SCALE 0.01mm per Ø



ORDER NO.	SHANK TYPE	DRAWBAR THREAD		Weight (kg)	CODE NO.
		S.A.E	METRIC		
VBHU-202	MT-3	1/2"-12W	M12X1.5P	6	3401-001
VBHU-203	MT-4	5/8"-11W	M16X2.0P	6.3	3401-002
VBHU-204	MT-5	1"-8W	M24X3.0P	7	3401-003
VBHU-205	R-8	7/16"-20UNF	n/a	6.2	3401-004
VBHU-206	NT-30	1/2"-12W	M12X1.75P	6	3401-005
VBHU-207	NT-40	5/8"-11W	M16X2.0P	6.2	3401-006
VBHU-208	NT-50	1"-8W	M24X3.0P	8.5	3401-007
VBHU-209	BT-40		M16X2.0P	6.9	3401-008
VBHU-210	C-25			4.5	3401-009
VBHU-211	SK-40		M16X2.0P	5.6	3401-010
VBHU-212	SK-50		M24X3.0P	8.3	3401-011
VBHU-213	BT-50		M24X3.0P	9.7	3401-012
VBHU-214	C-20			6	3401-013










SPECIFICATION VBHU



Unit:mm

ACTUAL SIZE	OVERING BAR HOLE SIZE	BORING BAR HOLE SIZE	CENTER DIST BETWEEN HOLES.	CROSS HOLE DIA	OFFSET
78	100	18	23	18	15

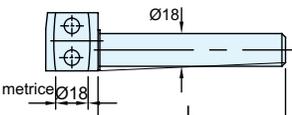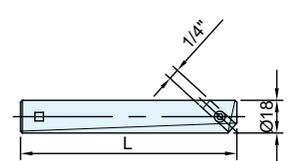
It is construction with precision parts, freedom of selection feeding quantity, auto feed and stop. Processing range from 5mm to 250mm.

 <p>Stop Rod BP-17</p>	 <p>Square Bit(HSS) BP-18</p>	 <table border="1"> <thead> <tr> <th colspan="2">Clamping Sleeve</th> </tr> </thead> <tbody> <tr> <td>metric</td> <td>D</td> </tr> <tr> <td>BP-7</td> <td>Ø10</td> </tr> <tr> <td>BP-8</td> <td>Ø12</td> </tr> </tbody> </table>	Clamping Sleeve		metric	D	BP-7	Ø10	BP-8	Ø12																
Clamping Sleeve																										
metric	D																									
BP-7	Ø10																									
BP-8	Ø12																									
 <table border="1"> <thead> <tr> <th colspan="2">Allen Key</th> </tr> </thead> <tbody> <tr> <td></td> <td>A</td> </tr> <tr> <td>BP-14</td> <td>4</td> </tr> <tr> <td>BP-15</td> <td>5</td> </tr> <tr> <td>BP-16</td> <td>6</td> </tr> </tbody> </table>	Allen Key			A	BP-14	4	BP-15	5	BP-16	6	 <table border="1"> <thead> <tr> <th colspan="2">Boring Bar</th> </tr> </thead> <tbody> <tr> <td>metric</td> <td>L</td> </tr> <tr> <td>BP-21</td> <td>104</td> </tr> </tbody> </table>	Boring Bar		metric	L	BP-21	104	 <table border="1"> <thead> <tr> <th colspan="2">Boring Bar</th> </tr> </thead> <tbody> <tr> <td>metric</td> <td>L</td> </tr> <tr> <td>BP-1</td> <td>90</td> </tr> <tr> <td>BP-2</td> <td>120</td> </tr> </tbody> </table>	Boring Bar		metric	L	BP-1	90	BP-2	120
Allen Key																										
	A																									
BP-14	4																									
BP-15	5																									
BP-16	6																									
Boring Bar																										
metric	L																									
BP-21	104																									
Boring Bar																										
metric	L																									
BP-1	90																									
BP-2	120																									
<table border="1"> <thead> <tr> <th colspan="2">Boring Bar</th> </tr> </thead> <tbody> <tr> <td>metric</td> <td>ØxL</td> </tr> <tr> <td>BP-9</td> <td>Ø18x90</td> </tr> <tr> <td>BP-10</td> <td>Ø10x80</td> </tr> <tr> <td>BP-11</td> <td>Ø10x70</td> </tr> <tr> <td>BP-12</td> <td>Ø10x60</td> </tr> </tbody> </table> 	Boring Bar		metric	ØxL	BP-9	Ø18x90	BP-10	Ø10x80	BP-11	Ø10x70	BP-12	Ø10x60														
Boring Bar																										
metric	ØxL																									
BP-9	Ø18x90																									
BP-10	Ø10x80																									
BP-11	Ø10x70																									
BP-12	Ø10x60																									

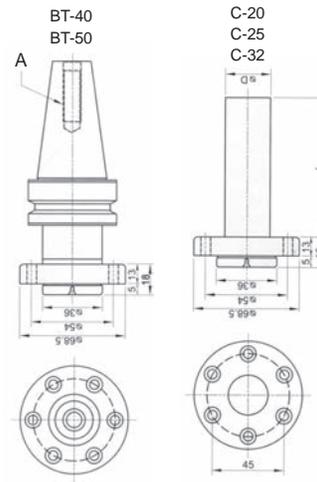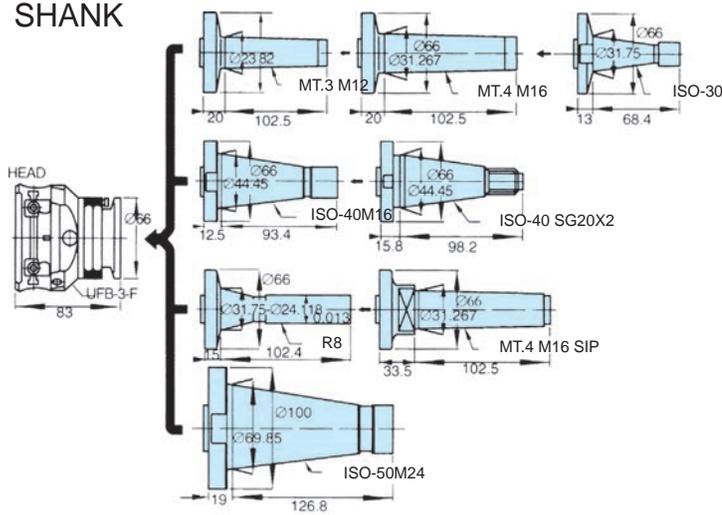SHANK




SHANK CHANGEABLE

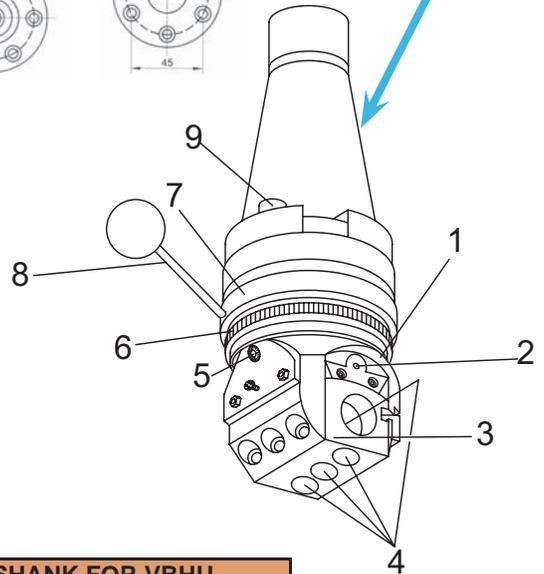

Main part of the universal boring heads is the body(1), in which the tool slide (3) moves on dovetail guideways. The tool slide is provided with holes for accommodation of tools and tool holders(4). In boring holes or turning external cylindrical surfaces, the tool is adjusted with the aid of the graduated dial for fine setting of tool slide(5), one division of which means a change in diameter of bored hole by .0005". On the types rapid adjustment of the tool slide(3) can be produced by rotating the graduated dial for quick adjustment of the tool slide(2). During recessing, turning of front or rear facings or similar jobs calling for automatic transverse feed movement to the tool slide, the preselected feed movement to the tool slide is engaged with the aid of the engagement ring (6). After setting of tool, the automatic transverse feed movement to the tool slide is started by braking of the brake ring(7), by means of the handle(8). The clutch(9) provides for tripping of the automatic feed movement when cutting resistance increases or when the trip dog is approached. Mechanism of the boring heads has a lubrication circuit delivering oil from two lubricators to all friction surfaces. All parts are hardened and working surfaces are ground.

SHANK FOR VBHU-		
MT-3	MT-4	MT-5
NT-30	NT-40	NT-50
R-8		
C-20	C25	C-32
BT-40		BT-50
	SK-40	SK-50

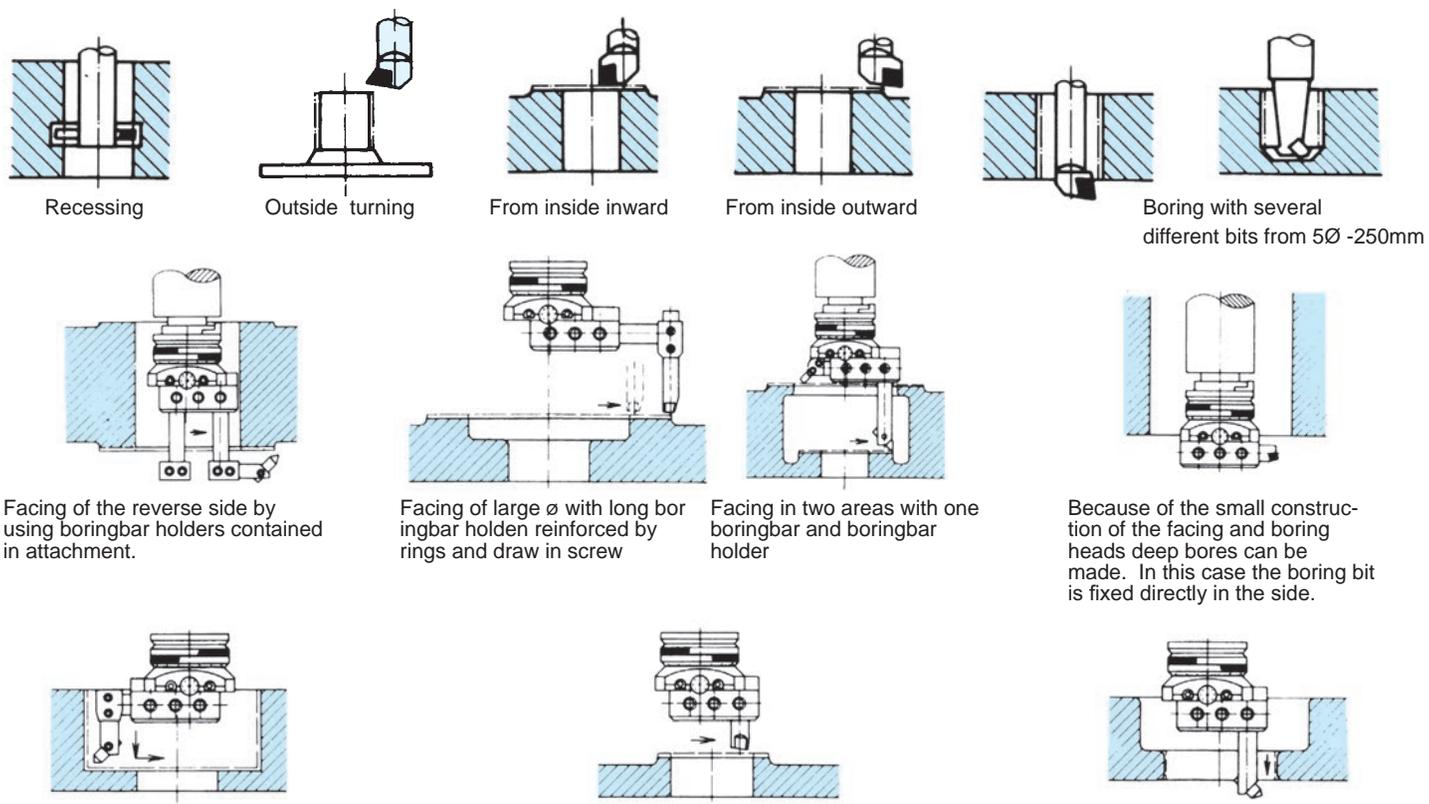

BORING HEAD SETS