

Sandblasters

SSK 1

Sandblast cabins for clean blasting without pollution of the working environment

Article number \checkmark

6204000

Brand ~

Unicraft

Availability 🗸

No stock available Information: Incoming stocks Expected on calendar week 45/2023

Catalog directory v

Workshop and lifting technology » Bodywork and workshop equipment » Sand blaster

Purchase 🗸

Minimum 4 pc(s).

Delivery content v

- High quality blasting gun with ceramic nozzle
- 4 ceramic nozzles (4/5/6/7 mm)
- 5 replacement foils for viewing windows

Shipping informations ~

| Packaging Metric | s | Weights | | Delivery | | Other | |
|------------------|--------|---------|----------|----------|----------|---------|-----|
| Length | 640 mm | Gross | 19 kg | Delivery | Carrier | DualUse | × |
| Width | 510 mm | Net | 17.25 kg | Content | 4 pc(s). | SCIP | n/a |
| Height | 520 mm | | | | | SVHC | No |

Root data 🗸

| Country of origin | EAN | Custom number | Quantity unit |
|-------------------|---------------|---------------|---------------|
| *` China | 4036351046097 | 84243010 | pc(s). |

Description V





- Suitable for various blasting materials, eg quartz, glass ball, plastic ball, etc.
- Ideal for cleaning, rust removal or paint removal of metal parts of all kinds, eg engine parts, fittings, signs, housings, rims, hinges
- High-quality work gloves made of latex are firmly attached to the housing
- Optimum vision and work safety during workpiece machining due to the lens with glued-on protective foil
- Dust-free work due to circumferential seals on cover and door frame
- Stable storage grid allows laying of workpieces in the cabin interior
- With drain opening for changing the blasting material
- Suction pipe for the blasting material attached to the bottom of the collecting container
- With compressed air connection on the outside
- Glass bead blasting, corundum blasting, silicon carbide, plastic blasting, etc. can be used

Room amenities:

• 12 volt fluorescent tube with 230 volt power supply and external switch


Media informations v



Technical data 🗸

| General features | | | |
|----------------------------------|-----------------|-------------------------------|-----------------|
| Air requirement average, approx. | 200 – 350 l/min | Working pressure | 2.8 – 8.0 bar |
| Abrasive grain size recommended | 0.2 – 0.3 mm | Max. abrasive grain size | 0.125 – 0.45 mm |
| Max. load of grid | 10 kg | Max. weight of blast media | 12 kg |
| Dimensions and weights | | | |
| Length (product) approx. | 590 mm | Width/depth (product) approx. | 489 mm |
| Height (product) approx. | 490 mm | Net weight approx. | 17.25 kg |
| Cabin volume | 90 I | Cabin interior length | 580 mm |
| Cabin interior width | 480 mm | Cabin interior height | 300 mm |
| Diameter of hand hole | 155 mm | | |
| Opening hatch (see drawing) | | | |
| Opening hatch A | 534 mm | Opening hatch B | 441 mm |

Accessories 🗸

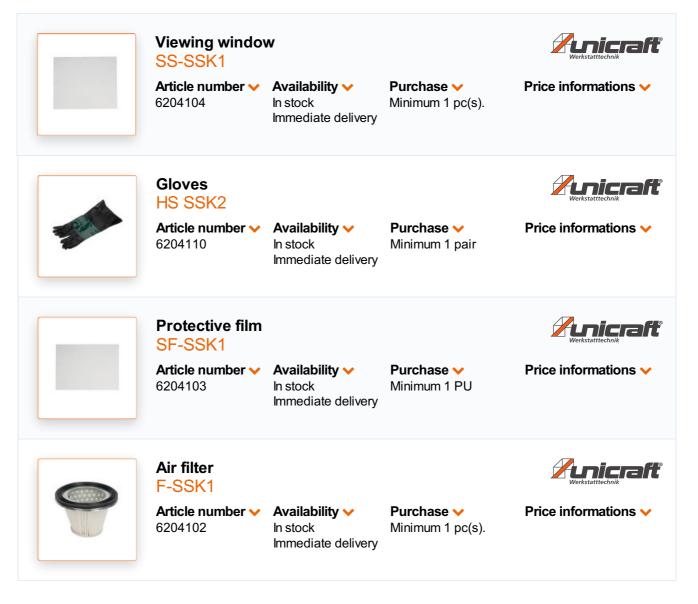

| | LED light tube for SSK 1 / SS Article number v 6204114 | | Purchase → Minimum 1 pc(s). | Price informations 🗸 |
|---|---|--|---|----------------------|
| | Gloves HS SSK1 Article number ↓ 6204100 | Availability ✓ No stock available Information: Incoming stocks Expected on calendar week 45/2023 | Purchase | Price informations ► |
| | Sandblasting n 6 mm Article number ¥ 6204132 | | Purchase → Minimum 1 pc(s). | Price informations V |
| | Sandblasting n Ceramic 4/5/6/ Article number ~ 6204130 | 7 mm | Purchase | Price informations V |
| T | Sandblasting g SSP SSK1 / 2 Article number v 6204101 | / 2.5 | Purchase → Minimum 1 pc(s). | Price informations V |
| | Fluorescent tul LSR SSK1 / 2 Article number v 6204113 | be Availability ❤ In stock Immediate delivery | Purchase → Minimum 1 pc(s). | Price informations V |

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.