

DATASHEET

Woodbandsaw

HBS 261-2

Reliable band saws for precise work

Article number v 5902426

Brand V Holzstar

Availability v Small stock amount Article available

Catalog directory V

Woodworking machinery » Bandsaws » Holzstar HBS

Purchase 🗸

Minimum 15 pc(s).





Delivery content v

- Saw band
- Longitudinal stop with loupe
- Miter stop
- LED work light
- Push stick
- Base

Shipping informations ~

Packaging M	etrics	Weights		Delivery		Other	
Length	1,010 mm	Gross	37 kg	Delivery	Carrier	DualUse	×
Width	450 mm	Net	34 kg	Content	15 pc(s).	SCIP	n/a
Height	385 mm					SVHC	No

Root data 🗸

Country of origin	EAN	Custom number	Quantity unit
China	4036351265610	84659110	pc(s).

Description 🗸

- · Ideal for ambitious modellers and do-it-yourselfers
- · Flywheels made of die-cast aluminum with special coating
- Aluminium cast iron worktable swiveling up to 45°
- Equipped with precise 3-rolls saw band guide above and below the table
- Aluminum longitudinal stop with quick clamping precisely adjustable with the aid of a magnifying glass and millimeter scale (except HBS 231-1)
- Two belt speeds adjustable (except HBS 231-1)


Media informations ~




Illustration shows HBS 261-2 with optional accessory circular cutting device (5912426)



Manual speed adjustment in two stages by folding the belt. Drive wheels for clean running surfaces equipped with chip brushes.



Aluminum rip fence with eccentric quick-clamping, easy and precise sliding, set value conveniently readable on millimeter scale.




Low-friction, precise and easily adjustable 3-roller saw band guide on top.

Technical data 🗸

Dimensions and weights			
Length (product) approx.	680 mm	Width/depth (product) approx.	520 mm
Height (product) approx.	1435 mm	Net weight approx.	34 kg
Extraction port			
Extraction port diameter	100 mm		
Work top(s)			
Work table length	360 mm	Work table width	320 mm
Work table height	935 mm	Work table pivot	0 – 45 °
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Input power	0.375 kW	Delivery power	0.22 kW
Cutting ranges			
Max. cutting height 90°	152 mm	Max. cutting height 45°	95 mm
Max. cutting width with stop	145 mm	Max. cutting width without stop	245 mm
Saw band			
Saw band speed(s)	400/800 m/min	Flywheel diameter	256 mm
Saw band length	1826 mm	Saw band width	10.0 mm
Saw band width max.	12.5 mm	Saw band thickness	0.35 mm

Accessories 🗸

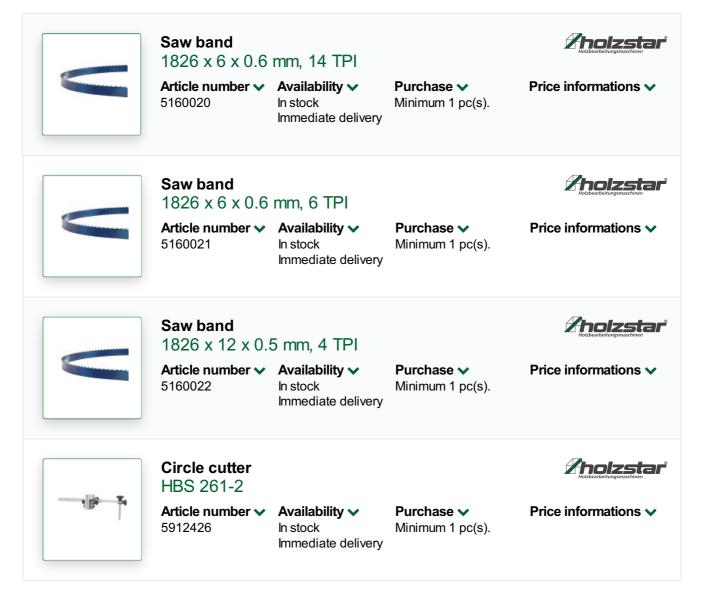

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.