

Woodbandsaw

HBS 321-2

Reliable band saws for precise work



Article number

5902432

Brand

Holzstar

Availability

No stock available

Information:

Incoming stocks

Expected on calendar week 45/2023

Catalog directory

Woodworking machinery » Bandsaws »

Holzstar HBS

Purchase

Minimum 8 pc(s).




Delivery content

- Saw band
- Longitudinal stop with loupe
- Miter stop
- LED work light
- Push stick
- Base

Shipping informations

Packaging Metrics		Weights		Delivery		Other	
Length	1,230 mm	Gross	54 kg	Delivery	Carrier	DualUse	✘
Width	530 mm	Net	51 kg	Content	8 pc(s).	SCIP	n/a
Height	435 mm					SVHC	No

Root data

Country of origin	EAN	Custom number	Quantity unit
 China	4036351265627	84659110	pc(s).

Description

- Ideal for ambitious modellers and do-it-yourselfers
- Flywheels made of die-cast aluminum with special coating
- Aluminium cast iron worktable swiveling up to 45°
- Equipped with precise 3-rolls saw band guide above and below the table
- Aluminum longitudinal stop with quick clamping precisely adjustable with the aid of a magnifying glass and millimeter scale (except HBS 231-1)
- Two belt speeds adjustable (except HBS 231-1)

Media informations




Illustration shows HBS 321-2 with optional accessory circular cutting device (5912432)



Manual speed adjustment in two stages by folding the belt. Drive wheels for clean running surfaces equipped with chip brushes.



Aluminum rip fence with eccentric quick-clamping, easy and precise sliding, set value conveniently readable on millimeter scale.

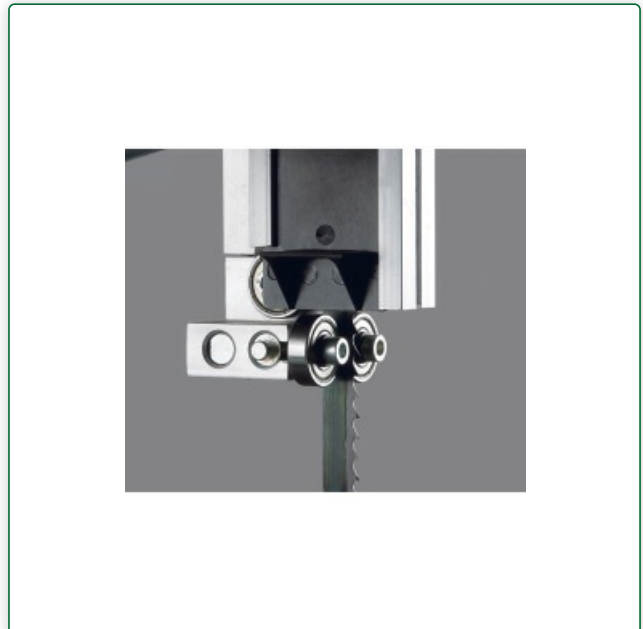









Low-friction, precise and easily adjustable 3-roller saw band guide on top.

Technical data

Dimensions and weights			
Length (product) approx.	780 mm	Width/depth (product) approx.	600 mm
Height (product) approx.	1600 mm	Net weight approx.	51 kg
Extraction port			
Extraction port diameter	100 mm		
Work top(s)			
Work table length	480 mm	Work table width	390 mm
Work table height	1000 mm	Work table pivot	0 – 45 °
Electrical Data			
Supply voltage	230 V	Mains frequency	50 Hz
Input power	0,75 kW	Delivery power	0,5 kW
Cutting ranges			
Max. cutting height 90°	165 mm	Max. cutting height 45°	105 mm
Max. cutting width with stop	225 mm	Max. cutting width without stop	305 mm
Saw band			
Saw band speed(s)	370/800 m/min	Flywheel diameter	316 mm
Saw band length	2240 mm	Saw band width	12.7 mm
Saw band width max.	20.0 mm	Saw band thickness	0,5 mm

Accessories ▼

	<p>Saw band 2240 x 6 x 0.6 mm, 6 TPI</p> <p>Article number ▼ 5160030</p> <p>Availability ▼ In stock Immediate delivery</p> <p>Purchase ▼ Minimum 1 pc(s).</p> <p>Price informations ▼</p>	
	<p>Saw band 2240 x 10 x 0.5 mm, 6 TPI</p> <p>Article number ▼ 5160031</p> <p>Availability ▼ In stock Immediate delivery</p> <p>Purchase ▼ Minimum 1 pc(s).</p> <p>Price informations ▼</p>	
	<p>Saw band 2240 x 16 x 0.5 mm, 4 TPI</p> <p>Article number ▼ 5160032</p> <p>Availability ▼ In stock Immediate delivery</p> <p>Purchase ▼ Minimum 1 pc(s).</p> <p>Price informations ▼</p>	
	<p>Saw band 2240 x 20 x 0.5 mm, 4 TPI</p> <p>Article number ▼ 5160033</p> <p>Availability ▼ In stock Immediate delivery</p> <p>Purchase ▼ Minimum 1 pc(s).</p> <p>Price informations ▼</p>	



Circle cutter HBS 321-2



Article number ✓
5912432

Availability ✓
In stock
Immediate delivery

Purchase ✓
Minimum 1 pc(s).

Price informations ✓

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.